

EXCA234BNCx-vvv




960H Outdoor Vandal Dome Camera

960H Sony Imaging Sensor, over 730 TVL Resolution. Choose Day/Night, Color@Night[®] or WDR. Equipped with 2.8–12 mm A1VF Lens, 12 VDC or Dual Voltage 12 VDC/24 VAC.

Designed, engineered, assembled and tested in the USA.

SENSOR SELECTION

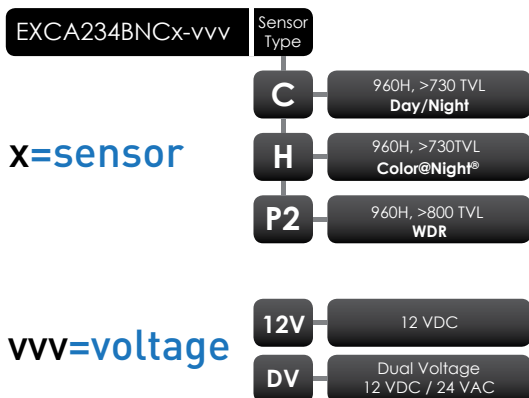

To select the sensor add the coordinate letter to the end of part number.

“C” = 960H, over 730TVL SONY Sensor with WDR function, perfect for most applications that do not require a very low light operation.

“H” = 960H, over 730TVL SONY Sensor with Color@Night technology that lets you see full color images in the dark without the use of IR LEDs.

“P2” = Sony 960H WDR - 2nd generation, over 800 TVL. The ultimate WDR technology plus unmatched low light sensitivity for night operation.

SPECIFICATIONS

Specs.	Type “C” Day/Night	Type “H” Color@Night [®]	Type “P2” WDR
Sensor	1/3" SONY 960H	1/3" SONY 960H	1/3" Sony 960H WDR
Resolution	960H, >730 TVL NTSC	960H, >730 TVL NTSC	960H, >800 TVL NTSC
Min. Illumination	0.02 Lux	0.00002 Lux (Sense-Up x256)	0.0005 Lux (Color) / 0.0002 Lux BW
Color@Night	N/A	YES	YES
S/N ratio [S/N]	52 dB (AGC off)	52dB	>52 dB
White balance	ATW1, ATW2, Manual	ATW1, ATW2, AWC, Manual	ATW, Push, User 1/2, Anti CR, Push Lock, Manual
Shutter	1/60–1/100,000	1/60–1/100,000	1/60 - 1/100,000
Privacy Mask	8 Programmable Zones	8 Programmable Zones	15 Programmable Zones
WDR	Digital Wide Dynamic Range (D - WDR)	N/A	Digital Wide Dynamic Range (D - WDR)
DNR	2D DNR	3D DNR	3D Motion DNR
Mirror	Reverse (H)	Reverse (H/V)	Reverse (H/V)
Motion Detection	YES	YES	YES
Digital Zoom	N/A	X1 – X10 (x0.1 Steps)	X1 – X256
OSD	YES	YES	YES
Power Supply	Dual Voltage 12V DC / 24V AC	Dual Voltage 12VDC / 24VAC	Dual Voltage 12V DC / 24V AC
Dimensions	5 3/8"(D) x 4 1/2"(H)	5 3/8"(D) x 4 1/2"(H)	5 3/8"(D) x 4 1/2"(H)